




12.5' CHIP BOX

- 17 to 18 Cubic Yards
- Primed, Painted and Clear Coated
- Interior of Chip Box and Under-carriage are Painted with PPG CRE
- Sides, Roof and Front are 14-Gauge Galvanneal
- LED Lighting
- Curb Side Ladder Box with Wider Compartment (Fits Gas Pruner)
- Floor is 12-Gauge Galvanneal
- Tail Gate is Curb Side Hinged for Safety
- Rear Tail Plate Tied into Sub Frame for Rigidity
- Vented Sides for Air Evacuation While Chipping

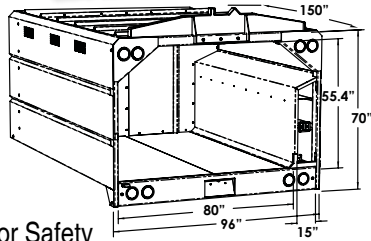

4 DOOR THRU BOX

- 48" Wide x 50" Tall
- (2) Spring Loaded Vertical Doors, Both Sides
- Exterior Locking Bar with Enclosed Lock Protector
- (4) Swivel Rope Hooks, Curb Side Only
- 14 Gauge Galvanneal, Seam-Sealed Panels
- (2) 24" Wide x 22" Deep Shelves, Both Sides
- (3) Thru Shelves, 10" Wide Various Heights
- Thru Compartments have Rubber Mats
- Chain on Bottom Shelf for Chain Saw Security
- Mechanical Tab Locking Throughout for Added Strength

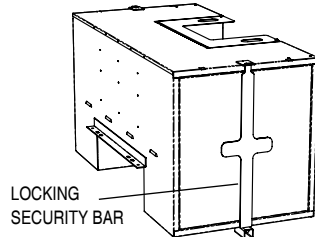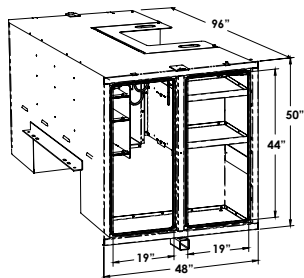

ADD-ONS

TRUCK OPTIONS

- Cone Holder (Various Styles)
- Sign Carriers
- Underbody Boxes
- Air Outlet in Tool Box (Air Brake Chassis Only)
- Kubota Motor for Lift Operation
- Placement of Customer Supplied Decals
- Front Mounted Construction Bumper
- Rear Chip Box Step

LIFT OPTIONS

- Start/ Stop at Bucket
- Emergency Power Below Rotation and/or at Bucket
- Larger Bucket 24"x30"x42"
- Boom Out of Stow Indicator on Dash

ACCESSORIES

- Hydraulic Pole Saws
- Bucket and Boom Scabbards
- Altumamats
- Dica Outrigger Pads
- Water Cooler and Rack



12660 E. Lynchburg Salem Tpk
Forest, VA 24551
Phone: (434) 525-2929
Fax: (434) 525-0917
E-Mail: sales@feva.net



www.feva.net

FEVA

Forestry Equipment of VA



FREIGHTLINER XT60 FORESTRY

CHASSIS (STOCK STANDARD)


- Freightliner Business Class M2 106, Painted White
- Cummins ISB Diesel, 250 HP
- SCR Technology with 5 Gallon DEF Tank
- 50 Gallon Aluminum Fuel Tank
- 138" Cab to Axle
- Allison 3500 RDS, 2500 RDS or 6 Speed Manual
- Air Brakes
- 14,600 lb Set Back Front Axle
- 21,000 lb Rear Axle
- Factory De-rated to 33,000 GVWR
- 12R22.5G Tires Front (2) and 11R22.5G Rear (4)
- 50-State Emissions Compliant
- Air Conditioning
- Engine Block Heater
- Dust/Bug Screen Mounted Behind Grill
- Weather Band AM / FM Radio
- Mud Flaps

STANDARD CONFIGURATION

- 12.5' Chip Box and Hoist Assembly with Holding Valve
- 48" (4) Door Thru Box
- Spring Loaded Cab Guard w/ Steps and Grab Handles
- Dash Mounted PTO Switch
- (2) Wheel Chocks with Underbody Storage
- (2) Outrigger Pads with Underbody Storage
- ICC Rear Bumper with T100 Pintle Hook
- Electronic Trailer Brake Controller
- (6) Prong Trailer Socket
- 35 Gallon Hydraulic Reservoir

TEREX HI-RANGER XT60 LIFT

- 65' of Working Height
- Side-Mounted 24"x24"x42" Platform, Rated to 350 lbs
- Bucket Liner and Scuff Pad
- "3D" One Hand Control
- Full Pressure, Open Center Hydraulic System
- Self Locking Hydraulic Rotational Gear Box
- Continuous Unrestricted Rotation
- Insulated Upper and Lower Boom
- Upper Boom Rest Tie Down
- Mechanical Platform Leveling
- Dual Hydraulic Tool Outlets at Platform
- 10 Year Maintenance Free Leveling System
- One Piece Molded Control Covers
- Rectangular Booms for Stability and Safety
- Greasable Pivots and Bearings
- (1) Set Hydraulic Outriggers & Controls
- Life Time Structural Warranty

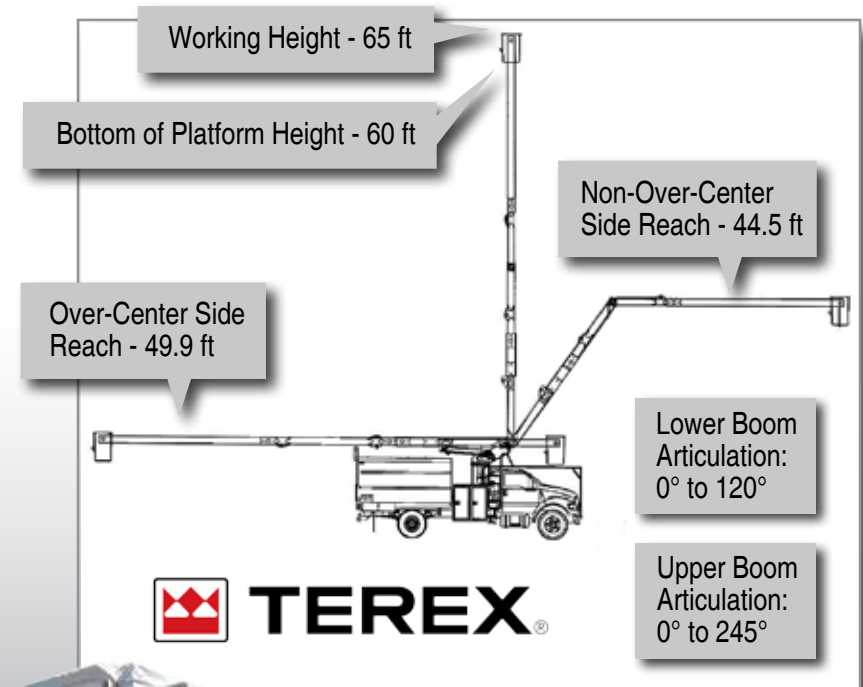

SAFETY

- Road Tested, Safety Inspected, DOT Inspected
- Dielectrically Tested to 46 kV
- ANSI A92.2 Certified
- All Lighting to Meet FMVSS #108 Standards
- PTO Engagement Allows Truck to Auto Regen
- Full Body Harness with Attached Lanyard
- Outrigger Interlock with Hydraulic Roller Valves
- Fire Extinguisher
- Triangle Reflector Kit
- Parking Brake Interlock
- (4) Point LED Strobe System
- Outrigger and Back up Alarms

